

Basic Flex BF350-G2

Technical Datasheet



Benefits

- Energy saving LED flexible strip for hospitality.
- Self-adhesive tape on the back for easy and fast installation.
- Consistent colour provides fine and comfort light output.
- Reliable connectors for easy cut and re-connection

Applications

- Hospitality lighting for hotels, retail shops, and household.
- Shelf lighting for retails, shops & supermarkets.
- Accent lighting for restaurants, shops, lobbies, hospitals.

Technical Operating Data

| Product | Color | No. of LEDs | Voltage [V DC]* | Power [W]* | Current [A]* | Wavelength Color Temp [K]* | Lum. Flux [lm]/meter * | Lum. Flux [lm]/chain* |
|-----------------|-------|-------------|-----------------|------------|--------------|----------------------------|------------------------|-----------------------|
| BF350-G2-827-05 | White | 240 | 24 | 17.5 | 0.73 | 2700 K | 350 | 1750 |
| BF350-G2-830-05 | White | 240 | 24 | 17.5 | 0.73 | 3000 K | 350 | 1750 |
| BF350-G2-840-05 | White | 240 | 24 | 17.5 | 0.73 | 4000 K | 370 | 1850 |

*) All Data are related to the entire module.

Due to the special conditions of the manufacturing processes of LED the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.

Technical Features


- Size of printed circuit board (L x W x H):
5000 mm x 8 mm x 1.2 mm
- Size of smallest unit : 125mm
- The LED pitch is 20.83mm
- Connection possible at the reel end or at the cut points
- 24V Constant Voltage LED modules
- Colour consistency 4 SCDM
- CRI 80
- Linear LED strip on flexible printed circuit board with self-adhesive tape at the back allow for easy mounting
- Up to 20,000 hrs lifetime at Tc = 60 °C.

Minimum / Maximum Ratings

| Product | Operating Temperature at Tc-Point [°C]* | Storage Temperature at Tc-Point [°C]* | Voltage Range [V dc]* | Reverse Voltage [V dc]* |
|-----------------|---|---------------------------------------|-----------------------|-------------------------|
| BF350-G2-827-05 | -10 ... 60 | -20 ... 65 | 23 ... 25 | 25 |
| BF350-G2-830-05 | -10 ... 60 | -20 ... 65 | 23 ... 25 | 25 |
| BF350-G2-840-05 | -10 ... 60 | -20 ... 65 | 23 ... 25 | 25 |

*) Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED Modules. Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED Modules. The temperature of the LED modules must be measured at the Tc-point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.

Dimension

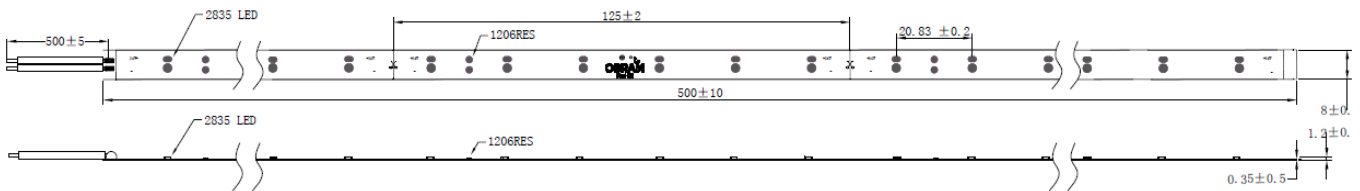

Safety Information

- The LED module itself and all its components must not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- To avoid mechanical damage, the LED modules should be attached securely to the intended substrate. Heavy vibration should be avoided.

The LED module incorporates no protection against short circuits, overload or overheating.

In order to drive OSRAM LED-Modules safely, it is absolutely necessary to operate them with an electronically stabilized power supply protecting against short circuits, overload and overheating.

For dimming applications attention should be paid to specific references in "OPTOTRONIC® Technical Guide". To also ease the luminaire/installation approval, electronic control gear for LED or LED modules must carry the CE mark.

In Europe the declarations of conformity must include the following standards:

CE: EN 61347-2-13, EN 55015, EN 61547 and EN 61000-3-2.

Also check for the mark of an independent authorized certification institute.

Please see the relevant application guides for more detailed information.

When using power supplies other than OPTOTRONIC® the following basic safety features are required, in addition to any other application specific concerns and local safety codes.

OSRAM OPTOTRONIC® electronic control gear complies to all relevant standards and guarantees safe operation.

- Installation of LED modules (with power supplies) needs to be made with regard to all applicable electrical and safety standards.
- Observe correct polarity! Incorrect polarity will lead to no light emission and may cause damage of the LED module.
- Parallel connection is highly recommended as safe electrical operation mode. Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the LED module.
- The maximum length of BF350-G2 is 5M with power feed at one end.
- When mounting on metallic or otherwise conductive surfaces, there needs to be a electrical isolation at soldering points between module and the mounting surface,
- Pay attention to ESD steps when mounting the module.
- Please ensure that the power supply is of adequate power to operate the total load.
- LED modules are dimmable by means of PWM (pulse width modulation). It is recommended using the following OSRAM control gears: OPTOTRONIC® OT DIM, OT DALI DIM, OT DALI DIM LI.
- The LED module must not be operated in places which are directly exposed to water or moisture, as it is for indoor applications.
- Damage by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
- For applications involving exposure to humidity and dust the module must be protected by a fixture or housing with a suitable protection class.



Assembly Information

- The smallest electrical unit (SEU) (125mm - 6 LEDs) can be removed by cutting at the printed marks at the side.
- After cutting connect the module via IP20 CONNECTOR system. Insert module into connector and apply pressure on a hard surface until locked.
- The mounting of the single LED coupons is facilitated by means of the double-sided adhesive on the back surface of the module. Care must be taken to provide a clean and dry mounting surface, free of oils or silicone coatings as well as dirt particle. The mounting substrate must have sufficient structural integrity. Take care to completely remove the adhesive backing. Once the module is appropriately positioned, press on the module with about 20N/cm² (refer to application techniques of Tesa adhesive transfer tapes). To support adhesion at higher temperatures, use additional mounting brackets if temperature exceeds $T_c = 60^\circ\text{C}$.
- The minimum bending radius is 5 cm.
- When installing in environments with large variations in temperature (e.g. outdoor applications) and operating length of more than 2 m, the use of adequate mounting surfaces is necessary . Otherwise it is advisable to use an additional thicker adhesive tape to absorb the stress of any mismatch in expansion.
- If temperature exceeds $T_c = 60^\circ\text{C}$, additional mounting brackets are needed.
- Pay attention to avoid highly corrosive atmospheres, e.g. permanent high humidity or Hydrogen Sulfide (H₂S). With current LED technology, H₂S is causing accelerated corrosion which will lead to shortened time life or premature failure. Sources for H₂S may be rubber, foamed rubber, soft-foam-tapes, sealing on rubber basis, natural sources (e.g. sulfur springs), etc. To avoid H₂S from sulfur-vulcanized rubber it is necessary to switch to silicon based materials or rubber that is Peroxid-crosslinked.
- Indication may be found in the material datasheet of the rubber supplier.


CONNECTOR system (to be ordered separately)

| Product code | EAN 10* | S-Unit* |
|--------------|---------------|---------|
| BF-2PIN Flex | 4052899951525 | 100 |
| BF-CONN Flex | 4052899951532 | 100 |

a) BF-2PIN Flex



b) BF-CONN Flex



Ordering Guide

| Product code | Product name | EAN 10* | S-Unit* |
|-----------------|-----------------------------|---------------|---------|
| BF350-G2-827-05 | Basic Flex 350lm/m G2 2700k | 4052899332263 | 20 |
| BF350-G2-830-05 | Basic Flex 350lm/m G2 3000k | 4052899332300 | 20 |
| BF350-G2-840-05 | Basic Flex 350lm/m G2 4000k | 4052899332348 | 20 |

* EAN 10: Ordering number per single sale unit

* S-Unit: Modules / accessory number per shipping unit

Note: Typical performance data are subject to change without any further notice, particularly as LED technology evolves.

Sales and Technical Support

OSRAM Asia Pacific

5/F, Hantang Building, OCT
Shennan Ave, Nan Shan District,
518053, Shenzhen, Guangdong, P.R.
China

www.osram.com

Sales and technical support is given by the local OSRAM subsidiaries. On our world wide homepage all OSRAM subsidiaries are listed with complete address and phone numbers.