










RECESSED INGROUND UPLIGHT


SPECIAL HOUSING DESIGNS AND HIGH-QUALITY OPTICAL COMPONENTS SPECIFICALLY FOR DEMANDING VISUAL TASKS TO PROVIDE ENHANCED VISUAL COMFORT. DISCREET AND COMPACT AESTHETICALLY DESIGNED ARCHITECTURAL OUTDOOR SPOTLIGHT, IDEAL FOR GLARE-FREE ACCENT LIGHTING, FLOODLIGHTING AND WALL WASHING IN THE OUTDOOR AREA.

LUMINAIRES WITH CREE COB OR XP-E/G LEDS PROVIDE EXCELLENT LIGHT QUALITY WITH HIGHLY PRECISE LIGHT DISTRIBUTION, FREE OF COLOUR SHIFTS AND DISTORTION, SPECIAL PCB LAYOUTS ENSURE THE LED MODULES ARE OPTIMALLY MATCHED TO THE OPTICAL SYSTEM OF THE LUMINAIRES. EMIT MORE THAN 90% OF THEIR INITIAL LUMINOUS FLUX UNTIL 50000 OPERATING HOURS.

CORROSION-RESISTANT CNC 6063# ALUMINUM BODY GIVES THE LUMINAIRE GOOD THERMAL CONDUCTIVITY, AND LARGE AREA CONNECTIONS BETWEEN THE REAR OF THE HOUSING AND THE LED'S PCB ENSURE GOOD HEAT CONDUCTION.

STAINLESS STEEL SCREWS, HIGH STRENGTH 4MM TOUGHENED GLASS >92% LIGHT TRANSMITTANCE, EXTREMELY NARROW TO WIDE BEAM OPTIONS, ROTATIONALLY SYMMETRIC LIGHT.

INSTALLATION ON FLOOR (WITH MOUNTING SLEEVE) AND GROUND (WITH OR WITHOUT MOUNTING SLEEVE).

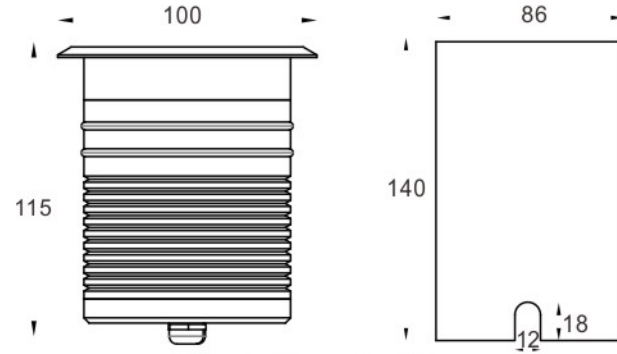


Physical Dimension(MM)

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
DX-UPL 1000308A	8W	3PCS CREE/OSRAM SMD	2200-6500K R/G/B/Y/A	5°/8°/10°/12° /25°/40°/60°	AC220-240V /AC110-130V	ON/OFF /Triac/0-10V
DX-UPL 1000310A	8W/10W				AC110-240V	ON/OFF
DX-UPL 1000308B	8-10W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512
DX-UPL 1000310B	8-10W	3PCS TYANSHINE SMD	Turnable White 2700K/6500K	25°/40°/60°	DC12V/DC24V	DMX512
DX-UPL 1000310C	8-10W		RGB 3in1			
DX-UPL 1000310D	8-10W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			
DX-UPL 1000108A	8W/10W	1PCS CREE SMD	2700K-6500K	3°	AC220V/AC110-240V /AC110-130V	ON/OFF /Triac/0-10V/DALI
DX-UPL 1000110A	8W/10W				DC12V/DC24V	ON/OFF /0-10V/DMX512
DX-UPL 1000108B	8W/10W	1PCS CITIZEN/CREE /LUMINUS COB		12°/24°/38°/45°/60° (Lens)	AC220V/AC110-240V /AC110-130V	ON/OFF /Triac/0-10V/DALI
DX-UPL 1000110B	8W/10W				DC12V/DC24V	ON/OFF /0-10V/DMX512
DX-UPL 1000108C	8W/10W			15°/24°/38° (Reflector Cup)	AC220V/AC110-240V /AC110-130V	ON/OFF /Triac/0-10V/DALI
DX-UPL 1000110C	8W/10W				DC12V/DC24V	ON/OFF /0-10V/DMX512

Material Specifications

Front cover :Stainless steel SUS316
Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B
high temperature painting
Driver:Constant current output,Constant current output
Glass:Step tempered glass
Mounting sleeve:ABS

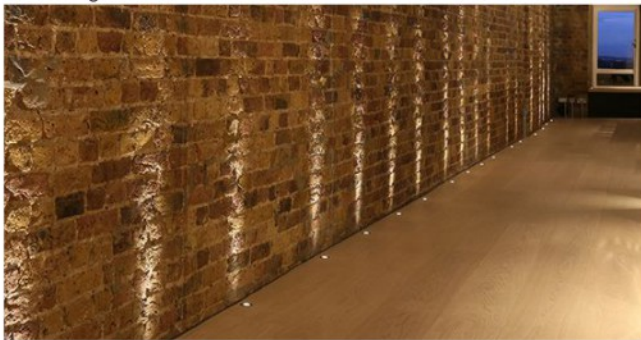

Inground Recessed



Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



Available in round
or square

Recessed Inground Uplight




RGB 3 in 1



RGBW 4 in 1

CREE




DMX512 DC24V AC220V
IP68 Connector

DALI/1-10V
Triac/PWM

CRI>80/90

IP67

IK08

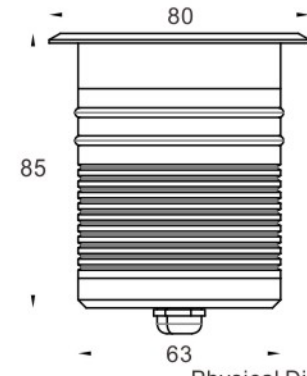

Physical Dimension(MM)

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
DX-UPL800305A	5W/7W	3PCS CREE/OSRAM SMD	2200-6500K R/G/B/Y/A	8°/12°/20°/30° /45°/60°	AC220-240V	ON/OFF /Triac/0-10V
DX-UPL800305B	5W/7W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512
DX-UPL800307A	5W/7W	3PCS TYANSHINE SMD	Turnable White 2700K/6500K	30°/45°/60°	DC24V/DC36V /DC48V	DMX512
DX-UPL800307B	5W/7W		RGB 3in1			
DX-UPL800307C	5W/7W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			
DX-UPL800105A	5W/7W	1PCS CREE SMD	2200-6500K R/G/B/Y/A	6°	AC220-240V	ON/OFF /Triac/0-10V
DX-UPL800107A	5W/7W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512
DX-UPL800105B	5W/7W	1PCS CITIZEN/CREE /LUMINUS COB	2700K-6500K	15°/24°/38° (Lens)	AC220-240V	ON/OFF /Triac/0-10V
DX-UPL800107B	5W/7W			15°/18°/34° (Reflector Cup)	DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512
DX-UPL800105C	5W/7W				AC220-240V	ON/OFF /Triac/0-10V
DX-UPL800107C	5W/7W				DC12V/DC24V /DC36V/DC48V	ON/OFF /0-10V/DALI/DMX512

Material Specifications

Front cover :Stainless steel SUS316
Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B
high temperature painting
Driver:Constant current output,Constant current output
Glass:Step tempered glass
Mounting sleeve:ABS



Ceiling Recessed



Features



High colour
rendering index




Excellent thermal
management



Dimmable versions
available



EMC-optimised

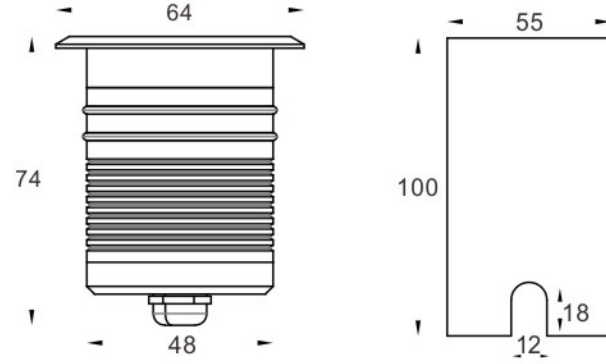

Physical Dimension(MM)

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
DX-UPL640103A	3-5W	1PCS CREE SMD	2700K-6500K	20°/40°	DC12V/DC24V	DMX512
DX-UPL640103B	3-5W	1PCS TYANSHINE SMD	Turnable White 2700K/6500K			
DX-UPL640105A	3-5W		RGB 3in1			
DX-UPL640105B	3-5W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			
DX-UPL640103C	3W	1PCS CREE SMD	2200-6500K R/G/B/Y/A	6°	AC220 /AC110-240V	ON/OFF
DX-UPL640105C	3-5W				DC12V/DC24V	ON/OFF /DMX512
DX-UPL640103D	3W	1PCS CREE /LUMINUS COB	2700K-6500K	15°/24°/38°/60° (Lens)	AC110-240V	ON/OFF
DX-UPL640105D	3-5W				DC12V/DC24V	ON/OFF /DMX512
DX-UPL640103E	3W	1PCS CREE /LUMINUS COB		18°/25°/35° (Reflector Cup)	AC220 /AC110-240V	ON/OFF
DX-UPL640105E	3-5W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac /0-10V/DALI/DMX512

Material Specifications

Front cover :Stainless steel SUS316
Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B high temperature painting
Driver:Constant current output,Constant current output
Glass:Step tempered glass
Mounting sleeve:ABS



Inground Recessed

Features



High colour rendering index



Excellent thermal management



Dimmable versions available



Available in round or square

Recessed Inground Uplight



RGB 3 in 1



RGBW 4 in 1

CREE




DMX512 DC24V AC220V
IP68 Connector

DALI/1-10V Triac/PWM

CRI>80/90

IP67

IK08

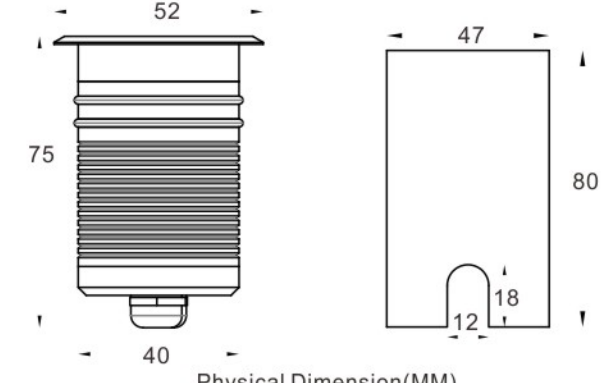

Physical Dimension(MM)

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
DX-UPL520102A	2-3W	1PCS CREE/OSRAM SMD	2200-6500K R/G/B/Y/A	5°/8°/10° /12°/25°/40°/60°	AC110-240V	ON/OFF
DX-UPL520102B	2.5W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac/0-10V/DALI
DX-UPL520103A	2-3W					DMX512
DX-UPL520102C	2W	1PCS TYANSHINE SMD	Turnable White 2700K/6500K	25°/40°/60°	DC12V/DC24V	DMX512
DX-UPL520101	1.5W		RGB 3in1			
DX-UPL520102D	2.5W		RGBW 4in1 (W: 2700K/3000K/4000K/5000K/5700K/6500K)		DC24V	
DX-UPL520103B	3W	1PCS CREE/LUMINUS COB	2700K-6500K	24°/36° (Reflector Cup)	AC110-240V	ON/OFF
DX-UPL520103C	2-3W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac /0-10V/DALI/DMX512

Material Specifications

Front cover :Stainless steel SUS316
Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B high temperature painting
Driver:Constant current output,Constant current output
Glass:Step tempered glass
Mounting sleeve:ABS



Ceiling Recessed

Features



High colour rendering index




Excellent thermal management



Dimmable versions available




EMC-optimised

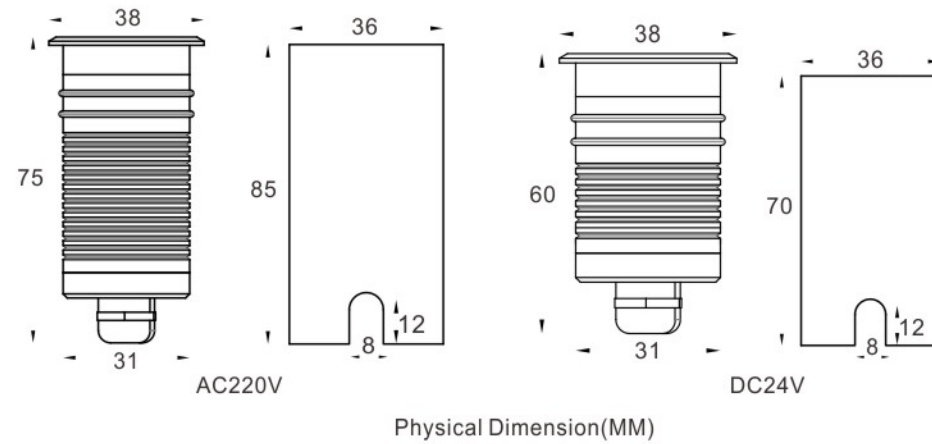

MODEL NO.	POWER	LIGHT SOURCE	LED COLOR	BEAM ANGLE	INPUT VOLT	CONTROL
DX-UPL380101A	1-1.5W	1PCS CREE/OSRAM SMD	2200-6500K R/G/B/Y/A	12°/25°/40°/60°	AC220-240V	ON/OFF
DX-UPL380101B	1-1.5W				DC12V/DC24V /DC36V/DC48V	ON/OFF /Triac/0-10V/DALI
DX-UPL380102A	2W					
DX-UPL380102B	2W	1PCS TYANSHINE SMD	Turnable White 2700K/6500K	25°/40°/60°	DC12V/DC24V	DMX512
DX-UPL380101C	1.5W		RGB 3in1			
DX-UPL380102C	2W		RGBW 4in1 (W: 2700K/3000K/4000K /5000K/5700K/6500K)			

Material Specifications

Front cover :Stainless steel SUS316
Housing:CNC 6063# aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B
high temperature painting
Driver:Constant current output,Constant current output
Glass:Step tempered glass
Mounting sleeve:ABS

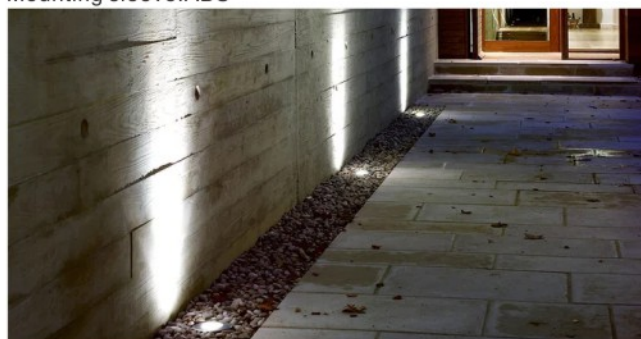

Inground Recessed



Features



High colour
rendering index



Excellent thermal
management



Dimmable versions
available



Available in round
or square

Recessed Inground Uplight



RGB 3 in 1



RGBW 4 in 1




DMX512 DC24V AC220V
IP68 Connector

DALI/1-10V
Triac/PWM

CRI>80/90

IP67

IK08

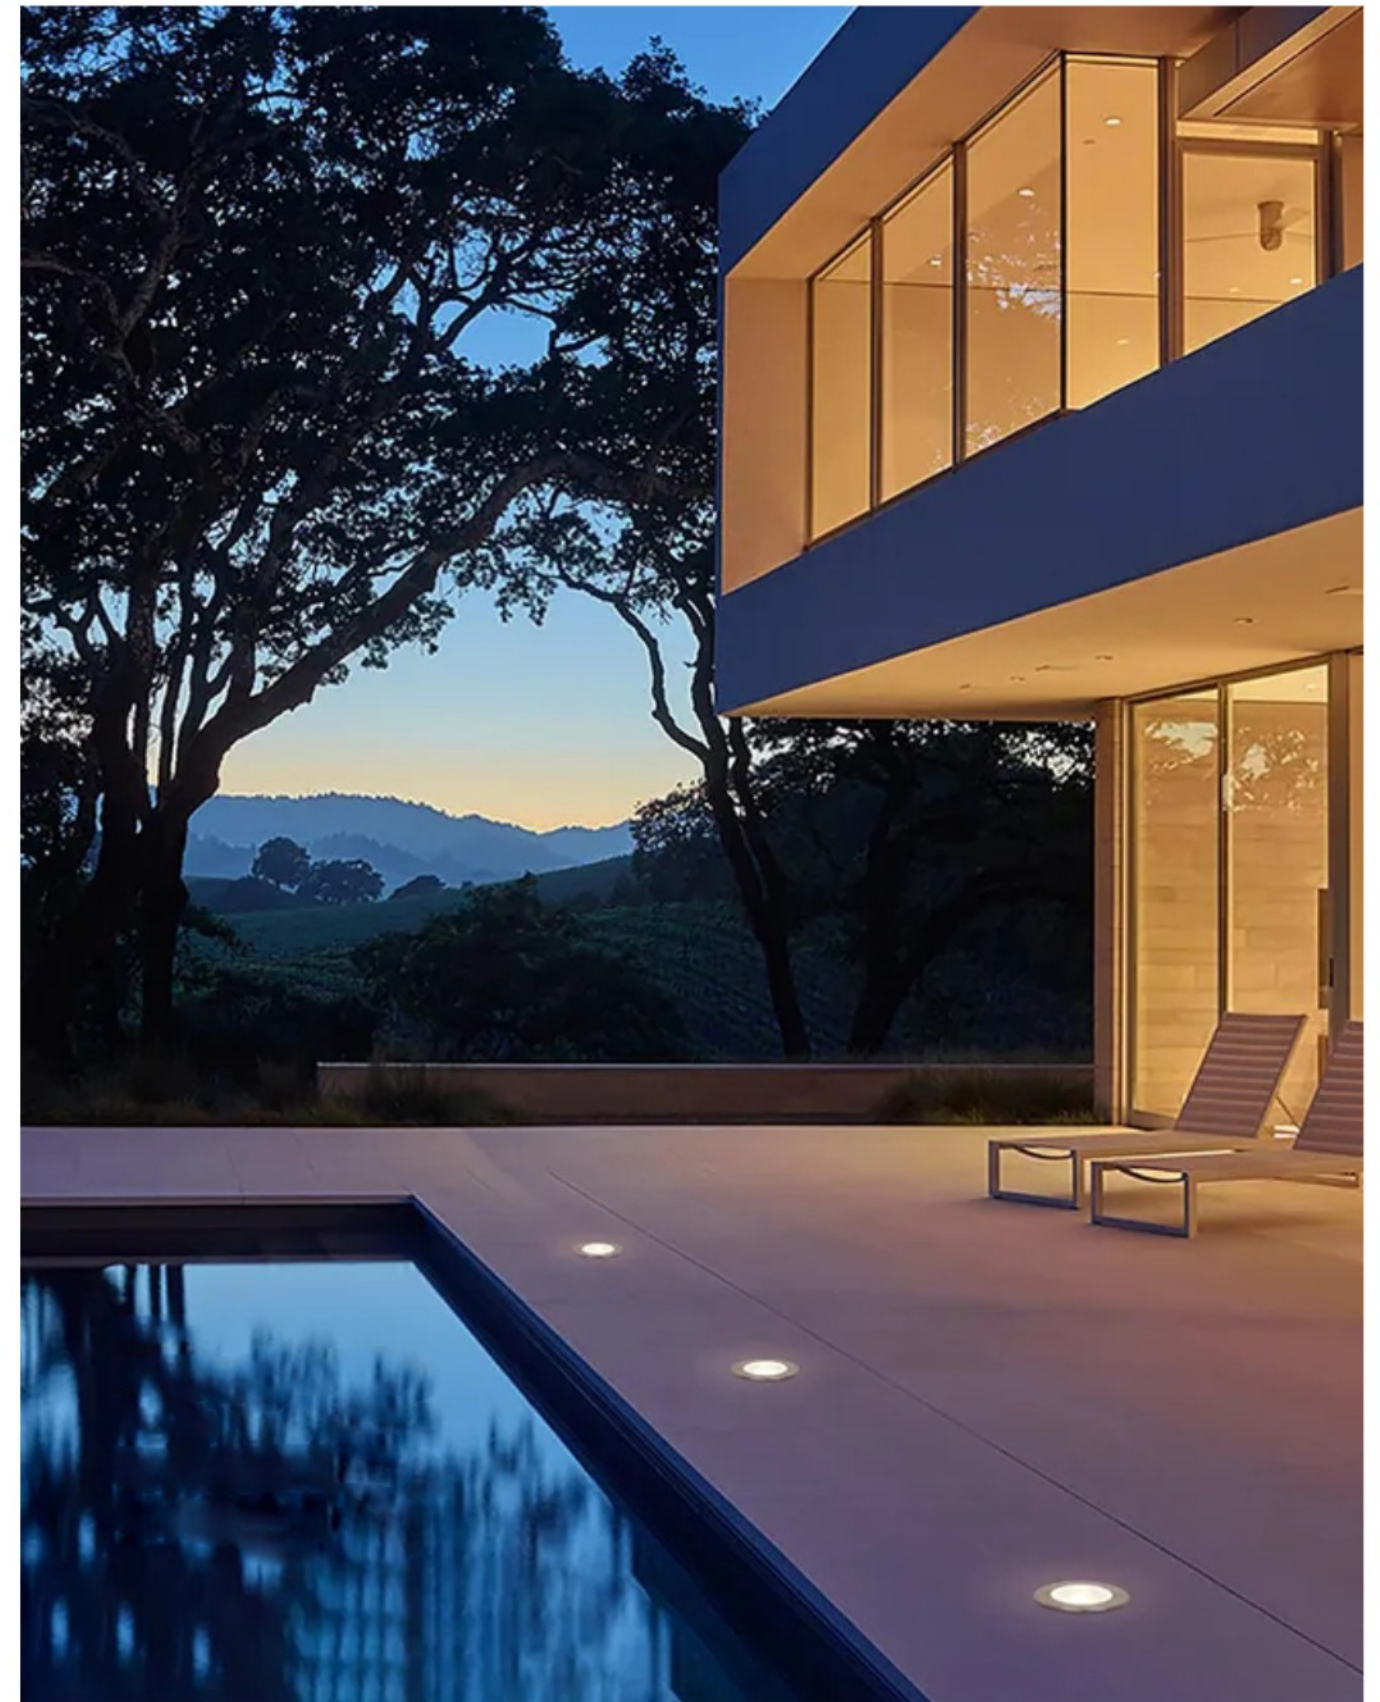



RECESSED INGROUND UPLIGHT

SPECIAL HOUSING DESIGNS AND HIGH-QUALITY OPTICAL COMPONENTS SPECIFICALLY FOR DEMANDING VISUAL TASKS TO PROVIDE ENHANCED VISUAL COMFORT. DISCREET AND COMPACT AESTHETICALLY DESIGNED ARCHITECTURAL OUTDOOR SPOTLIGHT, IDEAL FOR GLARE-FREE ACCENT LIGHTING, FLOODLIGHTING AND WALL WASHING IN THE OUTDOOR AREA.

LUMINAIRES WITH CREE COB OR XP-E/G LEDS PROVIDE EXCELLENT LIGHT QUALITY WITH HIGHLY PRECISE LIGHT DISTRIBUTION, FREE OF COLOUR SHIFTS AND DISTORTION, SPECIAL PCB LAYOUTS ENSURE THE LED MODULES ARE OPTIMALLY MATCHED TO THE OPTICAL SYSTEM OF THE LUMINAIRES. EMIT MORE THAN 90% OF THEIR INITIAL LUMINOUS FLUX UNTIL 50000 OPERATING HOURS.

CORROSION-RESISTANT CNC 6063# ALUMINUM BODY GIVES THE LUMINAIRE GOOD THERMAL CONDUCTIVITY, AND LARGE AREA CONNECTIONS BETWEEN THE REAR OF THE HOUSING AND THE LED'S PCB ENSURE GOOD HEAT CONDUCTION.

STAINLESS STEEL SCREWS, HIGH STRENGTH 4MM TOUGHENED GLASS >92% LIGHT TRANSMITTANCE, EXTREMELY NARROW TO WIDE BEAM OPTIONS, ROTATIONALLY SYMMETRIC LIGHT.

INSTALLATION ON FLOOR (WITH MOUNTING SLEEVE) AND GROUND (WITH OR WITHOUT MOUNTING SLEEVE).

