



TRAXON Plus⁺

Cove Light Plus AC White CE




The Traxon Cove Light Plus is an AC powered, slim, high brightness profile that effortlessly integrates into any architectural setting. Featuring 0-10V control, DMX or RDM control, White color options and a wide range of optical choices, its elegant modular design conceals powerful LED technology, allowing you to create a soft, uniform glow that bathes your surroundings in a captivating, gentle radiance.

Features


- 0-10V Dimming (0-10V Version only)
- DMX / RDM contro (DMX Version only)
- Easy installation and maintenance
- DMX Version: Auto-addressing
- RDM version: Auto-addressing or Manual Addressing via RDM

Dimensions

Open Beam Version

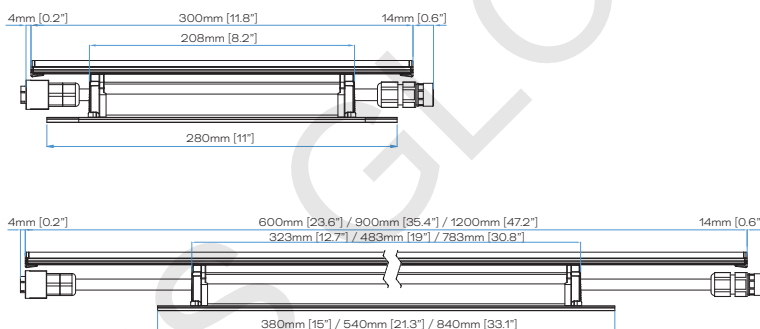

Optic Version

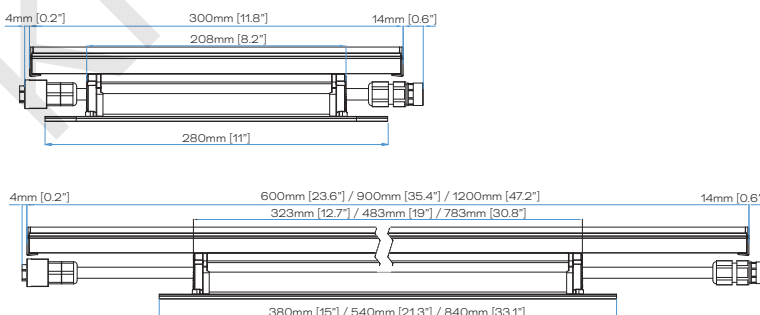

Project: _____

Type: _____



IP40
Dry/Damp Location



DMX 512



RDM




0-10V


Technologies

- 0-10V Dimming (0-10V Version only)
- DMX / RDM Control (DMX Version only)
- Auto-Addressing / Manual Addressing (DMX Version only)

Color Options

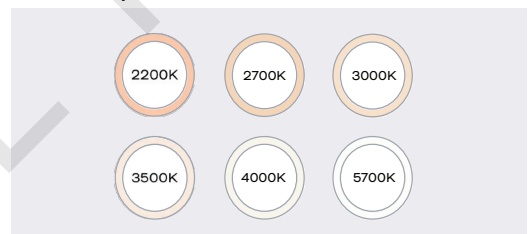

Beam Angles

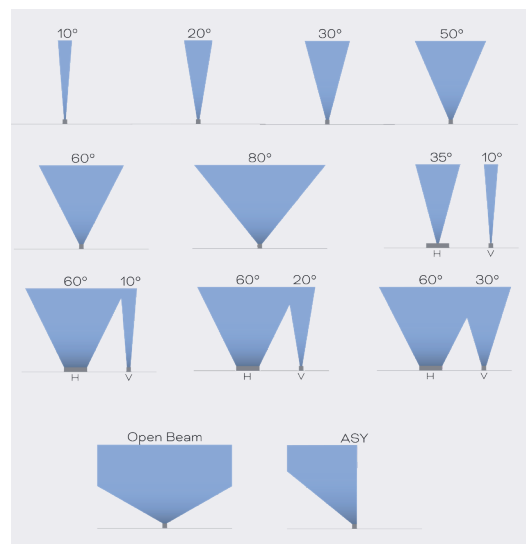

Product Specifications

Open Beam Version					Optic Version			
Length Option	300mm [1ft]	600mm [2ft]	900mm [3ft]	1200mm [4ft]	300mm [1ft]	600mm [2ft]	900mm [3ft]	1200mm [4ft]
Pixels (DMX Version only)	1	2 (1 pixel is on demand)	3 (1 pixel is on demand)	4 (1 / 2 pixel is on demand)	1	2 (1 pixel is on demand)	3 (1 pixel is on demand)	4 (1 / 2 pixel is on demand)
Color Range	White: 2200K, 2700K, 3000K, 3500K, 4000K, 5700K							
Color Resolution	16-Bit Grayscale, Gamma 2.2							
Refresh Rate	PWM 16k Hz							
LED Quantity	28 pcs	56 pcs	84 pcs	112 pcs	12 pcs	24 pcs	36 pcs	48 pcs
Beam Angle	Open Beam				10°, 20°, 30°, 50°, 60°, 80°, 35°x10°, 60°x10°, 60°x20°, 60°x30°, ASY			
Luminous Flux* (4000K 10° 0-10V Version) (Clear Optical Lens)	3W: 360 lm 5W: 690 lm 8W: 1128 lm 10W: 1450 lm	6W: 738 lm 10W: 1410 lm 16W: 2304 lm 20W: 2960 lm	9W: 1125 lm 15W: 2145 lm 24W: 3504 lm 30W: 4500 lm	12W: 1548 lm 20W: 2940 lm 32W: 4800 lm 40W: 6200 lm	3W: 252 lm 5W: 480 lm 8W: 784 lm 10W: 1000 lm	6W: 516 lm 10W: 980 lm 16W: 1600 lm 20W: 2080 lm	9W: 783 lm 15W: 1500 lm 24W: 2448 lm 30W: 3150 lm	12W: 1080 lm 20W: 2060 lm 32W: 3360 lm 40W: 4360 lm
Luminous Flux* (4000K 10° 0-10V Version) (Frosted Optical Lens)	3W: 333 lm 5W: 635 lm 8W: 1032 lm 10W: 1330 lm	6W: 678 lm 10W: 1290 lm 16W: 2112 lm 20W: 2720 lm	9W: 1035 lm 15W: 1965 lm 24W: 3216 lm 30W: 4140 lm	12W: 1416 lm 20W: 2700 lm 32W: 4416 lm 40W: 5720 lm	3W: 234 lm 5W: 445 lm 8W: 728 lm 10W: 930 lm	6W: 474 lm 10W: 910 lm 16W: 1472 lm 20W: 1900 lm	9W: 720 lm 15W: 1380 lm 24W: 2256 lm 30W: 2910 lm	12W: 996 lm 20W: 1900 lm 32W: 3104 lm 40W: 4000 lm
Efficacy* (4000K 10° 0-10V Version) (Clear Optical Lens)	3W: 120 lm/W 5W: 138 lm/W 8W: 141 lm/W 10W: 145 lm/W	6W: 123 lm/W 10W: 141 lm/W 16W: 144 lm/W 20W: 148 lm/W	9W: 125 lm/W 15W: 143 lm/W 24W: 146 lm/W 30W: 150 lm/W	12W: 129 lm/W 20W: 147 lm/W 32W: 150 lm/W 40W: 155 lm/W	3W: 84 lm/W 5W: 96 lm/W 8W: 98 lm/W 10W: 100 lm/W	6W: 86 lm/W 10W: 98 lm/W 16W: 100 lm/W 20W: 104 lm/W	9W: 87 lm/W 15W: 100 lm/W 24W: 102 lm/W 30W: 105 lm/W	12W: 90 lm/W 20W: 103 lm/W 32W: 105 lm/W 40W: 109 lm/W
Efficacy* (4000K 10° 0-10V Version) (Frosted Optical Lens)	3W: 111 lm/W 5W: 127 lm/W 8W: 129 lm/W 10W: 133 lm/W	6W: 113 lm/W 10W: 129 lm/W 16W: 132 lm/W 20W: 136 lm/W	9W: 115 lm/W 15W: 131 lm/W 24W: 134 lm/W 30W: 138 lm/W	12W: 118 lm/W 20W: 135 lm/W 32W: 138 lm/W 40W: 143 lm/W	3W: 78 lm/W 5W: 89 lm/W 8W: 91 lm/W 10W: 93 lm/W	6W: 79 lm/W 10W: 91 lm/W 16W: 92 lm/W 20W: 95 lm/W	9W: 80 lm/W 15W: 92 lm/W 24W: 94 lm/W 30W: 97 lm/W	12W: 83 lm/W 20W: 95 lm/W 32W: 97 lm/W 40W: 100 lm/W
CRI	≥80 & ≥90**, options available							
SDCM	≤3 step							
Housing	Aluminum LED module + PC body							
Housing Finish	White							
Optical Lens (cover)	Clear PC / Frosted PC							
Mounting	Surface Mount, optional mounting accessories are available							
Adjustment Options	-90° to +90°							
Dimensions ¹ (L x W x H)	300 x 38 x 49mm 11.8" x 1.5" x 1.9"	600 x 38 x 49mm 23.6" x 1.5" x 1.9"	900 x 38 x 49mm 35.4" x 1.5" x 1.9"	1200 x 38 x 49mm 47.2" x 1.5" x 1.9"	300 x 38 x 60mm 11.8" x 1.5" x 2.4"	600 x 38 x 60mm 23.6" x 1.5" x 2.4"	900 x 38 x 60mm 35.4" x 1.5" x 2.4"	1200 x 38 x 60mm 47.2" x 1.5" x 2.4"
Weight	0.44kg [0.97lbs]	0.79kg [1.74lbs]	1.06kg [2.34lbs]	1.53kg [3.37lbs]	0.46kg [1.01lbs]	0.83kg [1.83lbs]	1.12kg [2.47lbs]	1.61kg [3.55lbs]
Regulatory Listing & Safety Approval	Electrical Protection Class II, UKCA, CE							
Operating Temperature	-20°C to +45°C / -4°F to +113°F							
Storage Temperature	-30°C to +60°C / -22°F to +140°F							
Environment	Indoor, IP40, Dry / Damp Location							
Humidity	10-90%, non-condensing							

Electrical Specifications

Operating Voltage	220-240V AC 50 / 60Hz							
Power Consumption (W) (0-10V Version)	3 / 5 / 8 / 10	6 / 10 / 16 / 20	9 / 15 / 24 / 30	12 / 20 / 32 / 40	3 / 5 / 8 / 10	6 / 10 / 16 / 20	9 / 15 / 24 / 30	12 / 20 / 32 / 40
Power Consumption (W) (DMX Version)	3 / 5 / 8 / 12	6 / 10 / 16 / 24	9 / 15 / 24 / 36	12 / 20 / 32 / 48	3 / 5 / 8 / 12	6 / 10 / 16 / 24	9 / 15 / 24 / 36	12 / 20 / 32 / 48
Lumen Maintenance	L70 @ 25°C - 80000 hours							

System Specifications

Power Supply	AC line							
Control (0-10V Version)	0-10V Dimming, dim to 1% Current Sinking, <1mA per fixture							
Control (DMX Version)	DMX512 / RDM (Remote Device Management)							
Addressing Options	DMX Version: Auto-addressing RDM version: Auto-addressing or Manual Addressing via RDM							

*: 0-10v models. See photometric documents for additional data. The photometric data of the Frosted Optical Lens is 92% of the equivalent Clear Optical Lens. Multiply the lumen data of the Frosted Optical Lens by the factor of 0.92.

**>90 CRI not available in 2200K.




1: 450mm (18") length available by request. Please see your regional Traxon team regarding available and limitations.

LED CHARACTERISTICS: Because LEDs are semiconductor devices, their performances are subject to inherent variability commonly found in semiconductor industry. To improve consistency in performance across the same product, LED manufacturers "sort" LEDs into bins according to different preset parameters, such as forward driving voltage, illumination, etc. Whereas binning is a sorting function, it is not a correction process. Inherent variability in the manufacturing process results always in different binning distributions according to different production lots. Traxon uses automatically binned LEDs on its products, thereby minimizing output variations within the model range.



As with all electronic devices, LED output degrades over time - a term called lumen depreciation. This also explains why it is nearly impossible to expect photometric performances of two LED products with different service life spans to be the same. The rate of LED degrade is a complicated function of many factors such as operating efficiency, duration of continuous operation, and more significantly, environmental conditions (ambient temperature for example). If allowed working under optimal operating temperature range and with good ventilation, LED devices enjoy long service lives over conventional light sources. When using/installing LED devices, care should be taken to ensure that the devices will operate within the operating conditions specified in respective product literature.

Lumen measurement complies with LM-79-08 standard.
Lumen maintenance is calculated based on LM-80 compliant measurement.




Fixture (Open Beam)

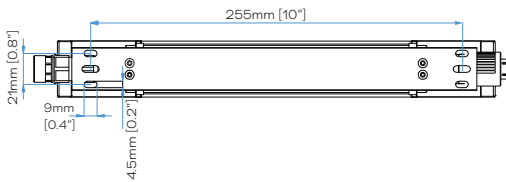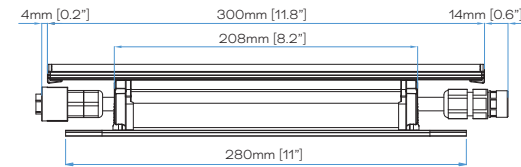



	W1	W2	W3	H1	H2
300mm [1ft]	38mm [1.5"]	35mm [1.4"]	29mm [1.1"]	49mm [1.9"]	27mm [1.1"]
600mm [2ft]	38mm [1.5"]	35mm [1.4"]	29mm [1.1"]	49mm [1.9"]	27mm [1.1"]
900mm [3ft]	38mm [1.5"]	35mm [1.4"]	29mm [1.1"]	49mm [1.9"]	27mm [1.1"]
1200mm [4ft]	38mm [1.5"]	35mm [1.4"]	29mm [1.1"]	49mm [1.9"]	27mm [1.1"]

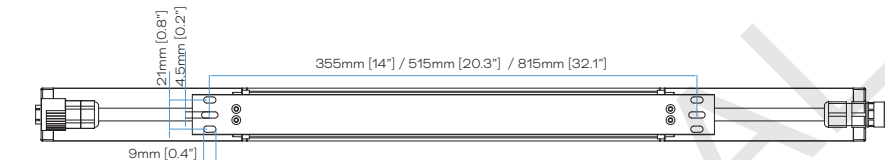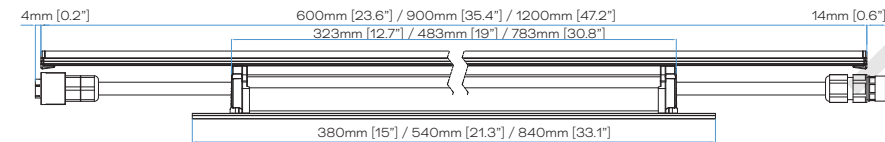

Fixture (Optics)

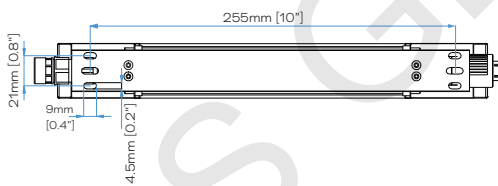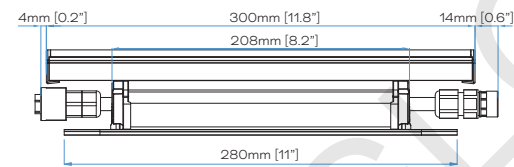


	W1	W2	W3	H1	H2
300mm [1ft]	38mm [1.5"]	35mm [1.4"]	29mm [1.1"]	60mm [2.4"]	38mm [1.5"]
600mm [2ft]	38mm [1.5"]	35mm [1.4"]	29mm [1.1"]	60mm [2.4"]	38mm [1.5"]
900mm [3ft]	38mm [1.5"]	35mm [1.4"]	29mm [1.1"]	60mm [2.4"]	38mm [1.5"]
1200mm [4ft]	38mm [1.5"]	35mm [1.4"]	29mm [1.1"]	60mm [2.4"]	38mm [1.5"]

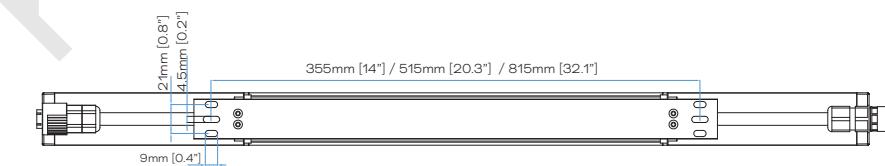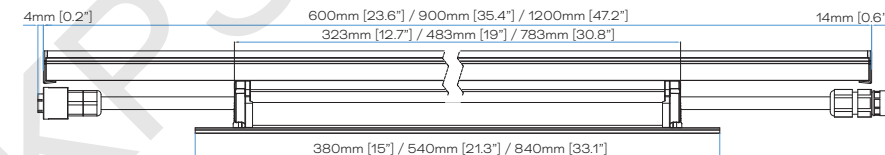


NOTE: Please see CAD files for additional dimensional data.

Connection Accessories (0-10V Version)


INTERCONNECTION CABLE SI 0-10V CE 0.3m / 1m / 3m
(CA.IC.SI.600300 / CA.IC.SI.601000 / CA.IC.SI.603000)



STARTER CABLE SI 1M 0-10V CE 1m / 3m (CA.SC.SI.601000 / CA.SC.SI.603000)
STARTER CABLE SI 1M 0-10V CE & END CAP SI (CA.SC.SI.601000 & END CAP SI)
STARTER CABLE SI 3M 0-10V CE & END CAP SI (CA.SC.SI.603000 & END CAP SI)




Connector Pin Assignment (Starter Cable / Interconnection Cable)

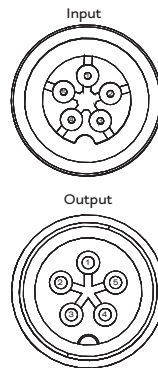


Wire#	Function	Color
1	DO NOT use	Green / Yellow
2	Neutral	Blue
3	0-10V Data+	Violet
4	0-10V Data-	Pink
5	Line	Brown

Connection Accessories (DMX Version)


POWER + DMX INTERCONNECTION CABLE 0.3M / 1M / 3M CE
(CA.IC.SI.300300 / CA.IC.SI.301000 / CA.IC.SI.303000)
0.3m, 1m, 3m / 0.98', 3.28', 9.84'




STARTER CABLE SI PWR / DMX 1M / 3M CE (CA.SC.SI.301000 / CA.SC.SI.303000)
STARTER CABLE SI 1M PWR/DMX CE & END CAP SI W/TERM (CA.SC.SI.301000 & END CAP SI W/TERM)
STARTER CABLE SI 3M PWR/DMX CE & END CAP SI W/TERM (CA.SC.SI.303000 & END CAP SI W/TERM)



POWER INPUT CABLE 1M / 3M CE
(CA.PC.SI.801000 / CA.PC.SI.803000)



Connector Pin Assignment (Starter Cable / Interconnection Cable)

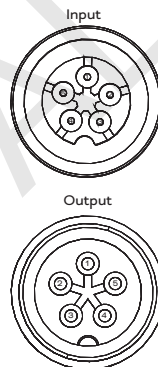

Wire#	Function	Color
1	DO NOT use	Green / Yellow
2	Neutral	Blue
3	DMX+	Violet
4	DMX-	Pink
5	Line	Brown

Connector Pin Assignment (Power Input Cable)




Wire#	Function	Color
1	Line	Brown
2	Neutral	Blue
3	DO NOT use	Green / Yellow

NOTE: Please see CAD files for additional dimensional data.


Cove Light Plus Injector

COVE LIGHT PLUS AC INJECTOR (DA23100474055)
COVE LIGHT PLUS AC INJECTOR & END CAP SI W/TERM (DL24302066655)

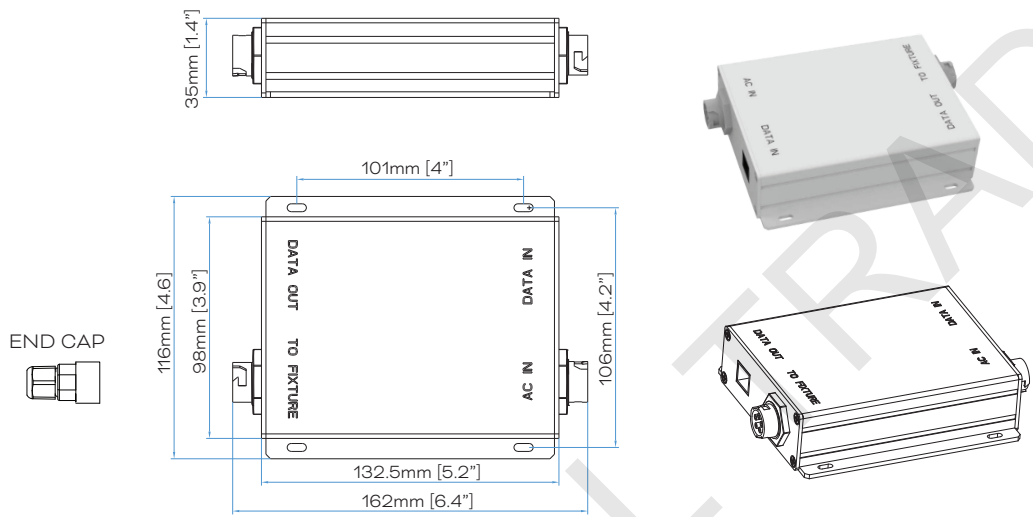

Cove Light Plus Wiring Box

COVE LIGHT PLUS WIRING BOX (DA24102044355)

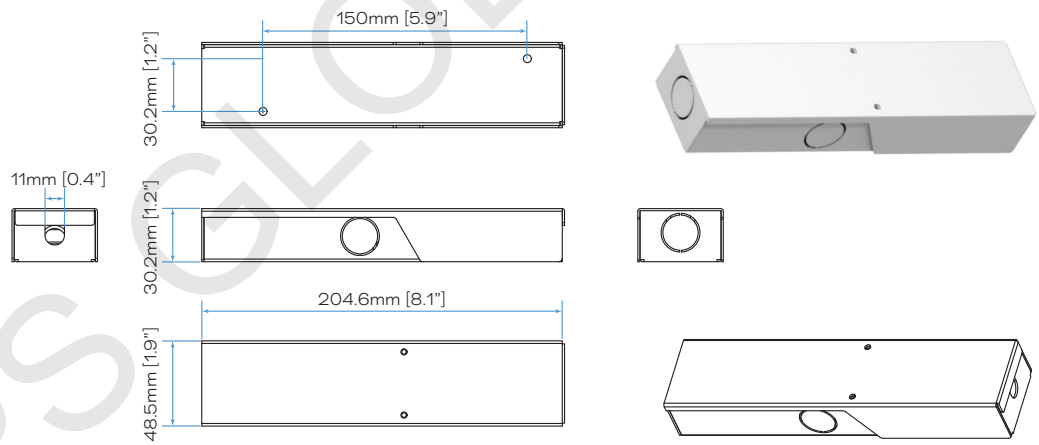

Mounting Accessories


COVE LIGHT PLUS CLIP MOUNT (without Track)



COVE LIGHT PLUS CLIP MOUNT (with Track)





COVE LIGHT PLUS TRACK MOUNT





NOTE: Please see CAD files for additional dimensional data.

Optical Accessories


COVE LIGHT PLUS LOUVER (ASYM) 300

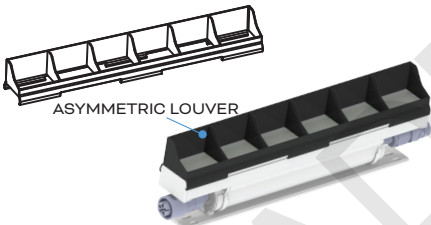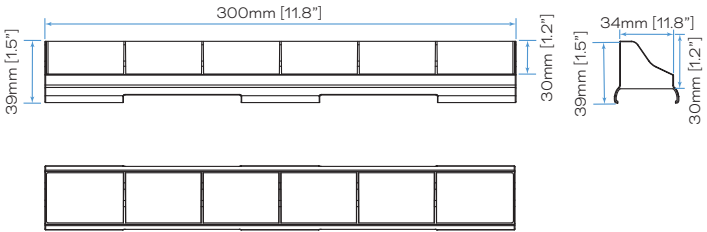



COVE LIGHT PLUS LOUVER (SYM) 300

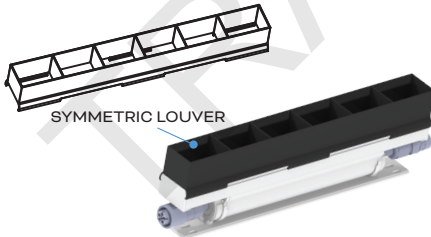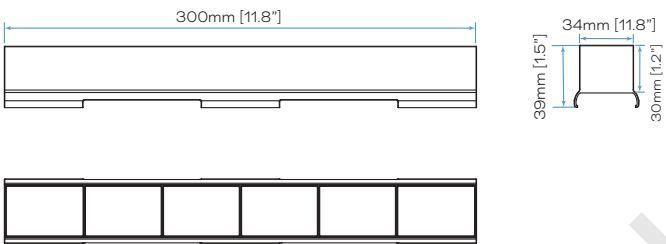

COVE LIGHT PLUS HONEYCOMB LOUVER 300

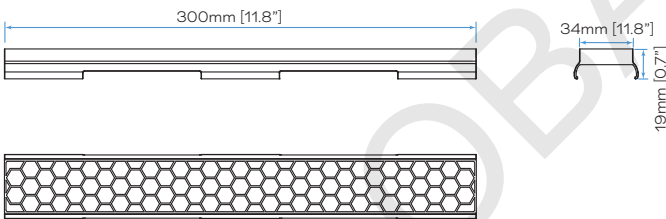


COVE LIGHT PLUS LOUVER PLATE 300

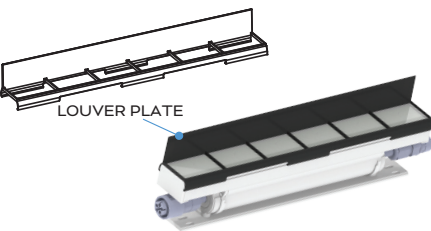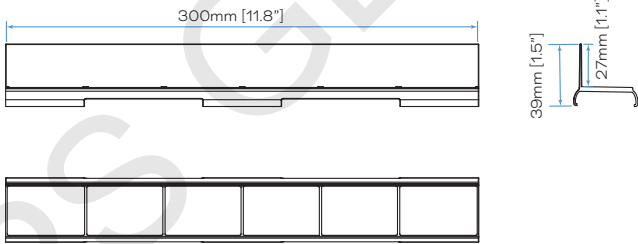


NOTE: All louver accessories are only available in 300mm (11.8") lengths. Fixture of 300mm or 1200mm length needs 1pc / 4pcs louvers respectively.

COVE LIGHT PLUS OPTICAL FILM (D) 300

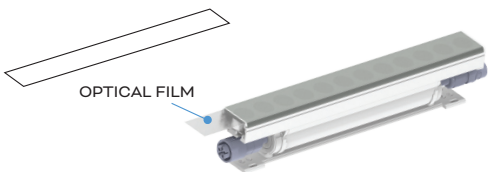


COVE LIGHT PLUS OPTICAL LENS CLEAR / FROSTED 300

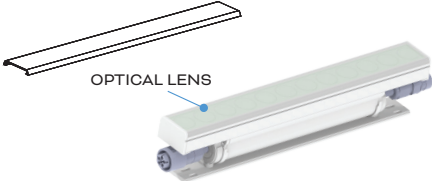

NOTE: Please see CAD files for additional dimensional data.


Cable Connection

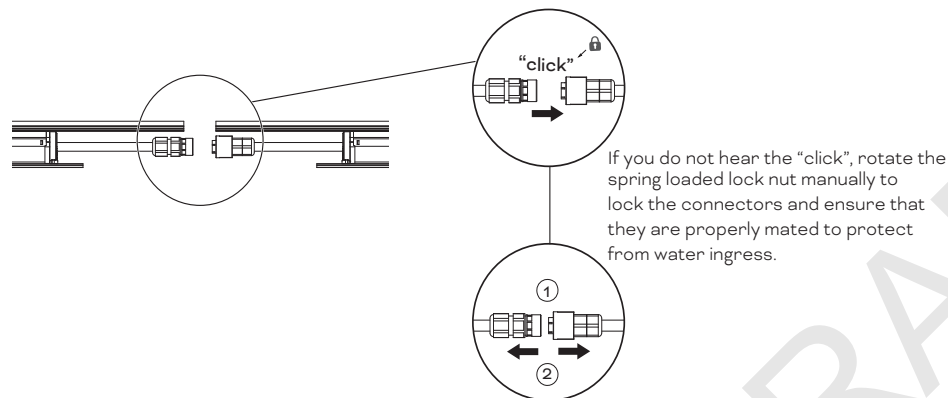


Cove-to-Cove Clearance

To maintain consistent LED pitch and to allow for thermal expansion for Cove Lights:


The minimum distance depends on the temperature difference.
Normally, it is 5mm/0.2"



End Cap Seal on Last Cove Light Plus




Cove-to-Cove Bending

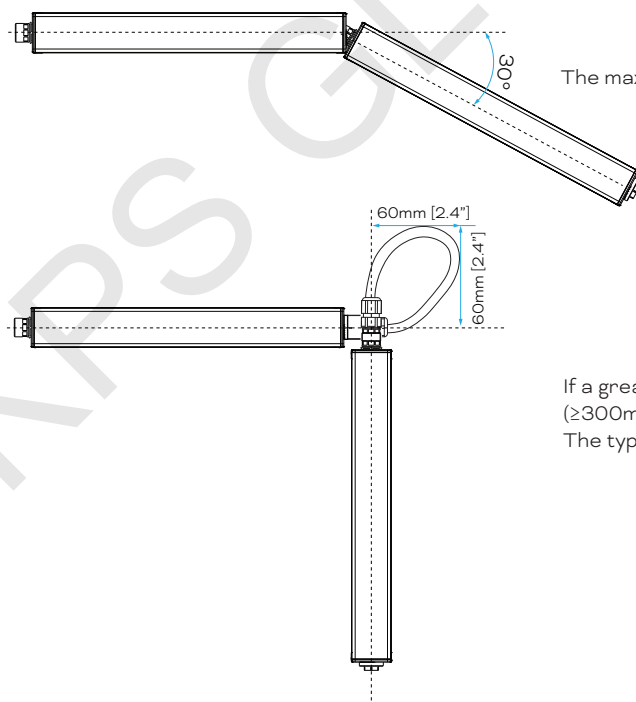


The maximum allowable end-to-end bending angle is 30°.

If a greater bending angle is needed, please utilize an interconnection (≥300mm / 11.8") cable to link the fixtures.
The typical bending radius should be 60mm [2.4"].


Wiring Diagram with Starter Cable (0-10V Version)

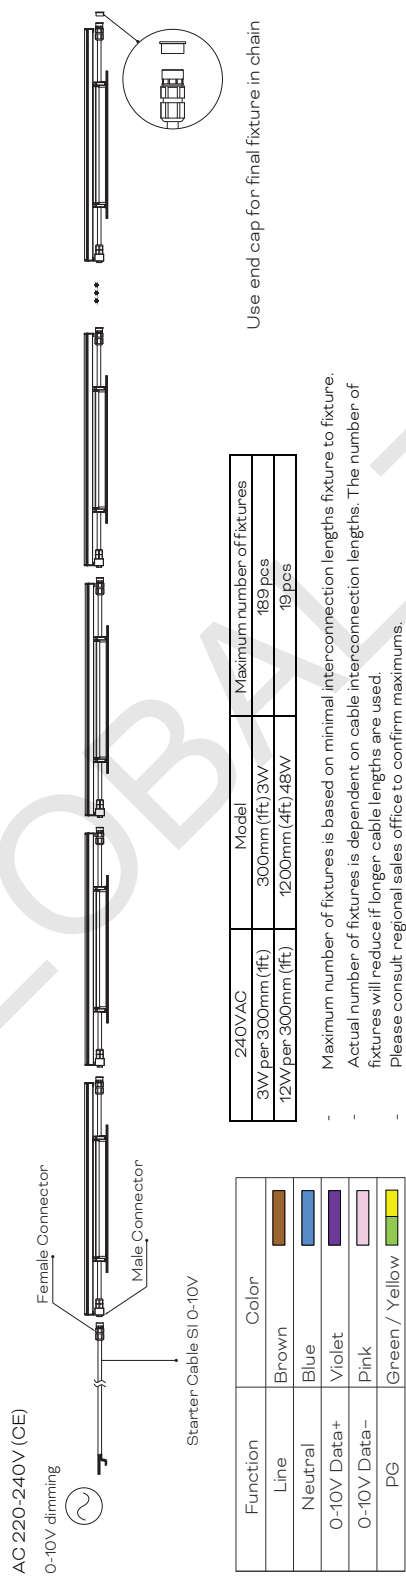

Wiring Diagram with Injector (DMX Version)

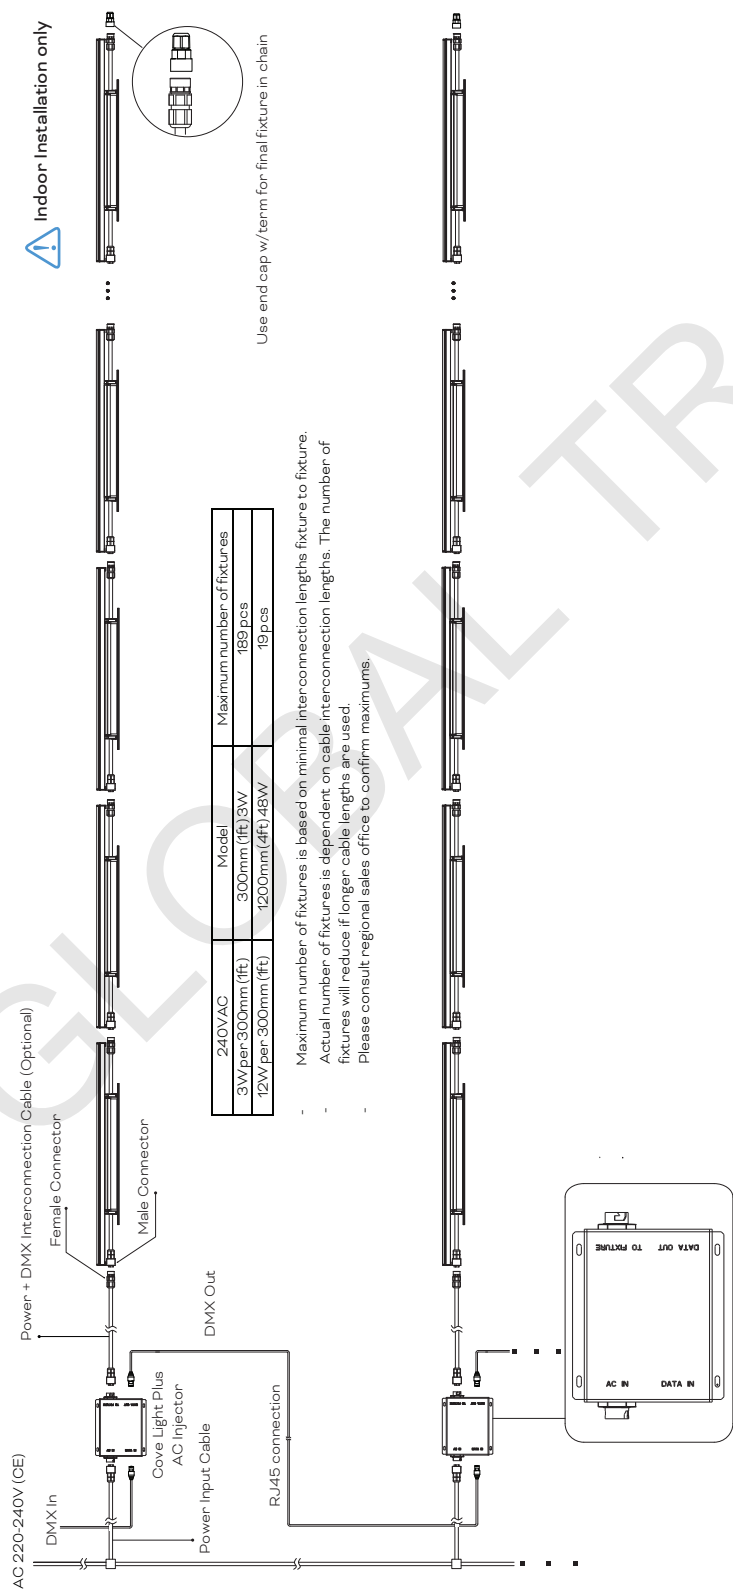

Wiring Diagram with Starter Cable (DMX Version)

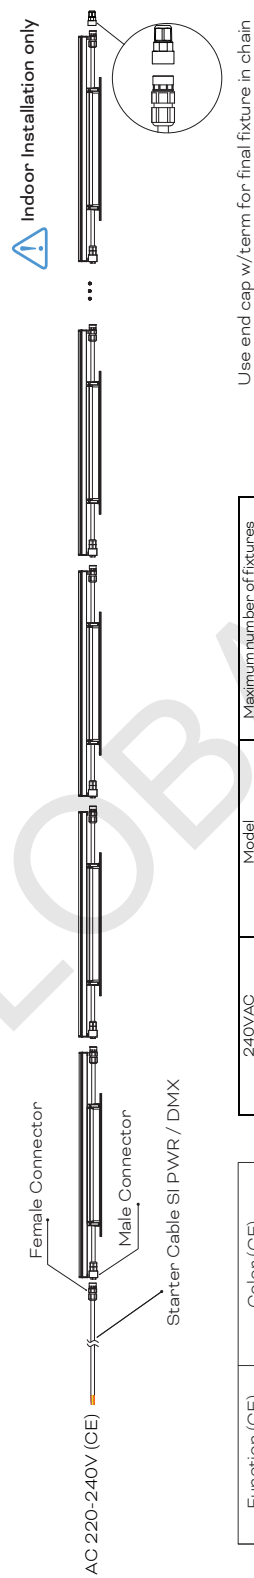

240VAC	Model	Maximum number of fixtures
3W per 300mm (ft)	300mm (ft) 3W	189 pcs
12W per 300mm (ft)	1200mm (4ft) 48W	19 pcs

- Maximum number of fixtures is based on minimal interconnection lengths fixture to fixture.
- Actual number of fixtures is dependent on cable interconnection lengths. The number of fixtures will reduce if longer cable lengths are used.
- Please consult regional sales office to confirm maximums.

Function (CE)	Color (CE)
Line	Brown
Neutral	Blue
DMX+	Violet
DMX-	Pink
DO NOT use	Green / Yellow

Model Number Builder - 0-10V Version

CL	PL	1	NN	5	N	N	N	N	N	3	6	0	0	0	0
		Voltage	Power per 0.3m (1ft)	LED	CCT	CRI	Optics/Beam	Optical Lens	Length**	Control	Approbation				
		1 - AC	03 - 3W	5 - White	0 - No CCT	0 - 80	0 - OB (Open Beam/120°)	0 - Clear	1 - 300mm (1ft)	3 - 0-10V	6 - CE				
			05 - 5W		1 - 2200K	1 - 90*	1 - 10° (native optics)	1 - Frosted	2 - 600mm (2ft)						
			08 - 8W		2 - 2700K		4 - 20°		3 - 900mm (3ft)						
			10 - 10W		3 - 3000K		5 - 30°		4 - 1200mm (4ft)						
					4 - 3500K		6 - 50°								
					5 - 4000K		7 - 60°								
					7 - 5700K		9 - 80°								
							B - 35°x10°								
							E - 60°x10°								
							G - 60°x20°								
							H - 60°x30°								
							J - ASY								

*: ≥90 CRI not available in 2200K.
** 450mm (18") length available by request. Please see your regional Traxon team regarding available and limitations.
EXAMPLE COVE LIGHT PLUS AC 8W 3000K OB CLEAR 300 0-10V OE
Model Number: CL.PL.108530001340000

CL	PL	1	08	5	3	0	0	0	1	3	6	0	0	0	0
----	----	---	----	---	---	---	---	---	---	---	---	---	---	---	---

Project Model Number

CL	PL	1		5						3	6	0	0	0	0
----	----	---	--	---	--	--	--	--	--	---	---	---	---	---	---

Model Number Builder - DMX Version

CL	PL	1	NN	5	N	N	N	N	N	N	6	0	N	0	0
		Voltage	Power per 0.3m (1ft)	LED	CCT	CRI	Optics/Beam	Optical Lens	Length***	Control	Approbation	Pixel**			
		1 - AC	03 - 3W	5 - White	0 - No CCT	0 - 80	0 - OB (Open Beam/120°)	0 - Clear	1 - 300mm (1ft)	1 - DMX	6 - CE	1 - 1PXL/fixture			
			05 - 5W		1 - 2200K	1 - 90*	1 - 10° (native optics)	1 - Frosted	2 - 600mm (2ft)	2 - RDM		2 - 2PXL/fixture			
			08 - 8W		2 - 2700K		4 - 20°		3 - 900mm (3ft)			3 - 3PXL/fixture			
			12 - 12W		3 - 3000K		5 - 30°		4 - 1200mm (4ft)			4 - 4PXL/fixture			
					4 - 3500K		6 - 50°								
					5 - 4000K		7 - 60°								
					7 - 5700K		9 - 80°								
							B - 35°x10°								
							E - 60°x10°								
							G - 60°x20°								
							H - 60°x30°								
							J - ASY								

*: ≥90 CRI not available in 2200K.
** Standard Pixel: 300mm fixture - 1PXL, 600mm fixture - 2PXL, 900mm - 3PXL, 1200mm fixture - 4 PXL.
*** 450mm (18") length available by request. Please see your regional Traxon team regarding available and limitations.
EXAMPLE COVE LIGHT PLUS AC 12W 3000K 30° CLEAR 300 DMX CE 1PXL
Model Number: CL.PL.112530501140100

CL	PL	1	12	5	3	0	5	0	1	1	6	0	1	0	0
----	----	---	----	---	---	---	---	---	---	---	---	---	---	---	---

Project Model Number

CL	PL	1		5							6	0		0	0
----	----	---	--	---	--	--	--	--	--	--	---	---	--	---	---

Cable/Connector - 0-10V Version

Model No.	Description	Item Code
CA.SC.SI.601000	STARTER CABLE SI 1M 0-10V CE	DA23100472255
CA.SC.SI.603000	STARTER CABLE SI 3M 0-10V CE	DA23100472355
CA.IC.SI.600300	INTERCONNECTION CABLE SI 0.3M 0-10V CE	DL24102067255
CA.IC.SI.601000	INTERCONNECTION CABLE SI 1M 0-10V CE	DA23100472655
CA.IC.SI.603000	INTERCONNECTION CABLE SI 3M 0-10V CE	DA23100472755
N / A	END CAP SI	DA23100769355
CA.SC.SI.601000 & END CAP SI	STARTER CABLE SI 1M 0-10V CE & END CAP SI	DL24102066055
CA.SC.SI.603000 & END CAP SI	STARTER CABLE SI 3M 0-10V CE & END CAP SI	DL24102066155

Cable/Connector - DMX Version

Model No.	Description	Item Code
CA.PC.SI.801000	POWER CABLE 1M (CL INJECTOR) CE	DA23100473055
CA.PC.SI.803000	POWER CABLE 3M (CL INJECTOR) CE	DA23100473155
CA.SC.SI.301000	STARTER CABLE SI 1M PWR/DMX CE	DA23100473455
CA.SC.SI.303000	STARTER CABLE SI 3M PWR/DMX CE	DA23100473555
CA.IC.SI.300300	INTERCONNECTION CABLE SI 0.3M PWR/DMX CE	DL24102067455
CA.IC.SI.301000	INTERCONNECTION CABLE SI 1M PWR/DMX CE	DA23100473855
CA.IC.SI.303000	INTERCONNECTION CABLE SI 3M PWR/DMX CE	DA23100473955
N/A	END CAP SI W/TERM	DA23100769255
CA.SC.SI.301000 & END CAP SI W/TERM	STARTER CABLE SI 1M PWR/DMX CE & END CAP SI W/TERM	DL24102066455
CA.SC.SI.303000 & END CAP SI W/TERM	STARTER CABLE SI 3M PWR/DMX CE & END CAP SI W/TERM	DL24102066555

Injector & Wiring Box

Model No.	Description	Item Code
N/A	COVE LIGHT PLUS AC INJECTOR	DA23100474055
N/A	COVE LIGHT PLUS AC INJECTOR & END CAP SI W/TERM	DL24302066655
N/A	COVE LIGHT PLUS WIRING BOX	DA24102044355

Optical Accessory - Louver

Model No.	Description	Item Code
CLPL.LO-S.600200	COVE LIGHT PLUS LOUVER (SYM) 300	DA24102053255
CLPL.LO-A.600200	COVE LIGHT PLUS LOUVER (ASYM) 300	DA24102053355
CLPL.LO-P.600200	COVE LIGHT PLUS LOUVER PLATE 300	DA24102053455
CLPL.HC.600200	COVE LIGHT PLUS HONEYCOMB LOUVER 300	DA24102053555

Optical Accessories - Optical Film

Model No.	Description	Item Code
CLPL.OL.608400	COVE LIGHT PLUS OPTICAL LENS CLEAR 300	DA24102044455
CLPL.OL.708400	COVE LIGHT PLUS OPTICAL LENS CLEAR 600	DA24102044555
CLPL.OL.808400	COVE LIGHT PLUS OPTICAL LENS CLEAR 900	DA24102044655
CLPL.OL.908400	COVE LIGHT PLUS OPTICAL LENS CLEAR 1200	DA24102044755
CLPL.OL.608500	COVE LIGHT PLUS OPTICAL LENS FROSTED 300	DA24102044855
CLPL.OL.708500	COVE LIGHT PLUS OPTICAL LENS FROSTED 600	DA24102044955
CLPL.OL.808500	COVE LIGHT PLUS OPTICAL LENS FROSTED 900	DA24102045055
CLPL.OL.908500	COVE LIGHT PLUS OPTICAL LENS FROSTED 1200	DA24102045155
CLPL.OF-D.611000	COVE LIGHT PLUS OPTICAL FILM (D) 20° 300	DA24102045255
CLPL.OF-D.612000	COVE LIGHT PLUS OPTICAL FILM (D) 30° 300	DA24102045355
CLPL.OF-D.613000	COVE LIGHT PLUS OPTICAL FILM (D) 50° 300	DA24102045455
CLPL.OF-D.614000	COVE LIGHT PLUS OPTICAL FILM (D) 60° 300	DA24102045555
CLPL.OF-D.616000	COVE LIGHT PLUS OPTICAL FILM (D) 80° 300	DA24102045655
CLPL.OF-D.618000	COVE LIGHT PLUS OPTICAL FILM (D) 35°x10° 300	DA24102045755
CLPL.OF-D.621000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x10° 300	DA24102045855
CLPL.OF-D.623000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x20° 300	DA24102045955
CLPL.OF-D.624000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x30° 300	DA24102046055
CLPL.OF-D.711000	COVE LIGHT PLUS OPTICAL FILM (D) 20° 600	DA24102046155
CLPL.OF-D.712000	COVE LIGHT PLUS OPTICAL FILM (D) 30° 600	DA24102046255
CLPL.OF-D.713000	COVE LIGHT PLUS OPTICAL FILM (D) 50° 600	DA24102046355
CLPL.OF-D.714000	COVE LIGHT PLUS OPTICAL FILM (D) 60° 600	DA24102046455
CLPL.OF-D.716000	COVE LIGHT PLUS OPTICAL FILM (D) 80° 600	DA24102046555
CLPL.OF-D.718000	COVE LIGHT PLUS OPTICAL FILM (D) 35°x10° 600	DA24102046655
CLPL.OF-D.721000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x10° 600	DA24102046755
CLPL.OF-D.723000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x20° 600	DA24102046855
CLPL.OF-D.724000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x30° 600	DA24102046955
CLPL.OF-D.811000	COVE LIGHT PLUS OPTICAL FILM (D) 20° 900	DA24102047055
CLPL.OF-D.812000	COVE LIGHT PLUS OPTICAL FILM (D) 30° 900	DA24102047155
CLPL.OF-D.813000	COVE LIGHT PLUS OPTICAL FILM (D) 50° 900	DA24102047255
CLPL.OF-D.814000	COVE LIGHT PLUS OPTICAL FILM (D) 60° 900	DA24102047355
CLPL.OF-D.816000	COVE LIGHT PLUS OPTICAL FILM (D) 80° 900	DA24102047455
CLPL.OF-D.818000	COVE LIGHT PLUS OPTICAL FILM (D) 35°x10° 900	DA24102047555
CLPL.OF-D.821000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x10° 900	DA24102047655
CLPL.OF-D.823000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x20° 900	DA24102047755
CLPL.OF-D.824000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x30° 900	DA24102047855
CLPL.OF-D.911000	COVE LIGHT PLUS OPTICAL FILM (D) 20° 1200	DA24102047955
CLPL.OF-D.912000	COVE LIGHT PLUS OPTICAL FILM (D) 30° 1200	DA24102048055
CLPL.OF-D.913000	COVE LIGHT PLUS OPTICAL FILM (D) 50° 1200	DA24102048155
CLPL.OF-D.914000	COVE LIGHT PLUS OPTICAL FILM (D) 60° 1200	DA24102048255
CLPL.OF-D.916000	COVE LIGHT PLUS OPTICAL FILM (D) 80° 1200	DA24102048355
CLPL.OF-D.918000	COVE LIGHT PLUS OPTICAL FILM (D) 35°x10° 1200	DA24102048455
CLPL.OF-D.921000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x10° 1200	DA24102048555
CLPL.OF-D.923000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x20° 1200	DA24102048655
CLPL.OF-D.924000	COVE LIGHT PLUS OPTICAL FILM (D) 60°x30° 1200	DA24102048755
Note: No ASY OPTICAL Film (must use native optics fixture and not by Optical Film)		

Mounting Accessories

Model No.	Description	Item Code
N/A	COVE LIGHT PLUS TRACK 300	DA24102053655
N/A	COVE LIGHT PLUS TRACK 600	DA24102053755
N/A	COVE LIGHT PLUS TRACK 900	DA24102053855
N/A	COVE LIGHT PLUS TRACK 1200	DA24102053955
N/A	COVE LIGHT PLUS TRACK 2400	DA24102054055
N/A	COVE LIGHT PLUS TRACK 300 (10 PCS)	DA24102056455
N/A	COVE LIGHT PLUS TRACK 600 (10 PCS)	DA24102056555
N/A	COVE LIGHT PLUS TRACK 900 (10 PCS)	DA24102056655
N/A	COVE LIGHT PLUS TRACK 1200 (10 PCS)	DA24102056755
N/A	COVE LIGHT PLUS TRACK 2400 (10 PCS)	DA24102056855
N/A	COVE LIGHT PLUS CLIP MOUNT (10 PCS)	DA24102054155
N/A	COVE LIGHT PLUS CLIP MOUNT (2PCS) WITH TRACK 300	DA24102054255
N/A	COVE LIGHT PLUS CLIP MOUNT (2PCS) WITH TRACK 600	DA24102054355
N/A	COVE LIGHT PLUS CLIP MOUNT (2PCS) WITH TRACK 900	DA24102054455
N/A	COVE LIGHT PLUS CLIP MOUNT (2PCS) WITH TRACK 1200	DA24102054555

KPS GLOBAL TRADE CO.,LTD
19/23 Kanchanapisek3 Laksong Bankae Bangkok 10160
Tel: 097-145-4444,02-101-0491,061-445-4963 Email:info.kps.trade@gmail.com